

ADDENDUM

Peoria Park District  
Bradley Park Equipment Service Center  
1314 N. Park Road  
Peoria, IL 61604  
Telephone: (309) 686-3386

ADDENDUM NO. ONE

PROJECT TITLE: Charter Oak South Dam Repair

ISSUANCE DATE: June 19, 2013

The proposed Contract Documents for this Work are modified as follows:

I. DRAWINGS:

For clarification, a sheet showing the original plans, and a sheet of images of before and after the 2010 repair is attached.

II. PROJECT MANUAL/SPECIFICATIONS/GENERAL CONDITIONS/ETC.:

Clarification: The engineer's report states that the gap between the pipe sections, is 5", not the 12" that was stated at the pre-bid meeting.

Clarification: At the pre-bid meeting it was incorrectly stated that the Park District would lower the level of the pond. The Park District will NOT be able to perform that work before the work of this contract begins. The Contractor may opt to lower the water level in the pond by up to 4', or may proceed making provisions for work in a flowing pipe.


III. INVITATION TO BID: No change

END OF ADDENDUM NO. ONE



install  
below grade

173'-0"

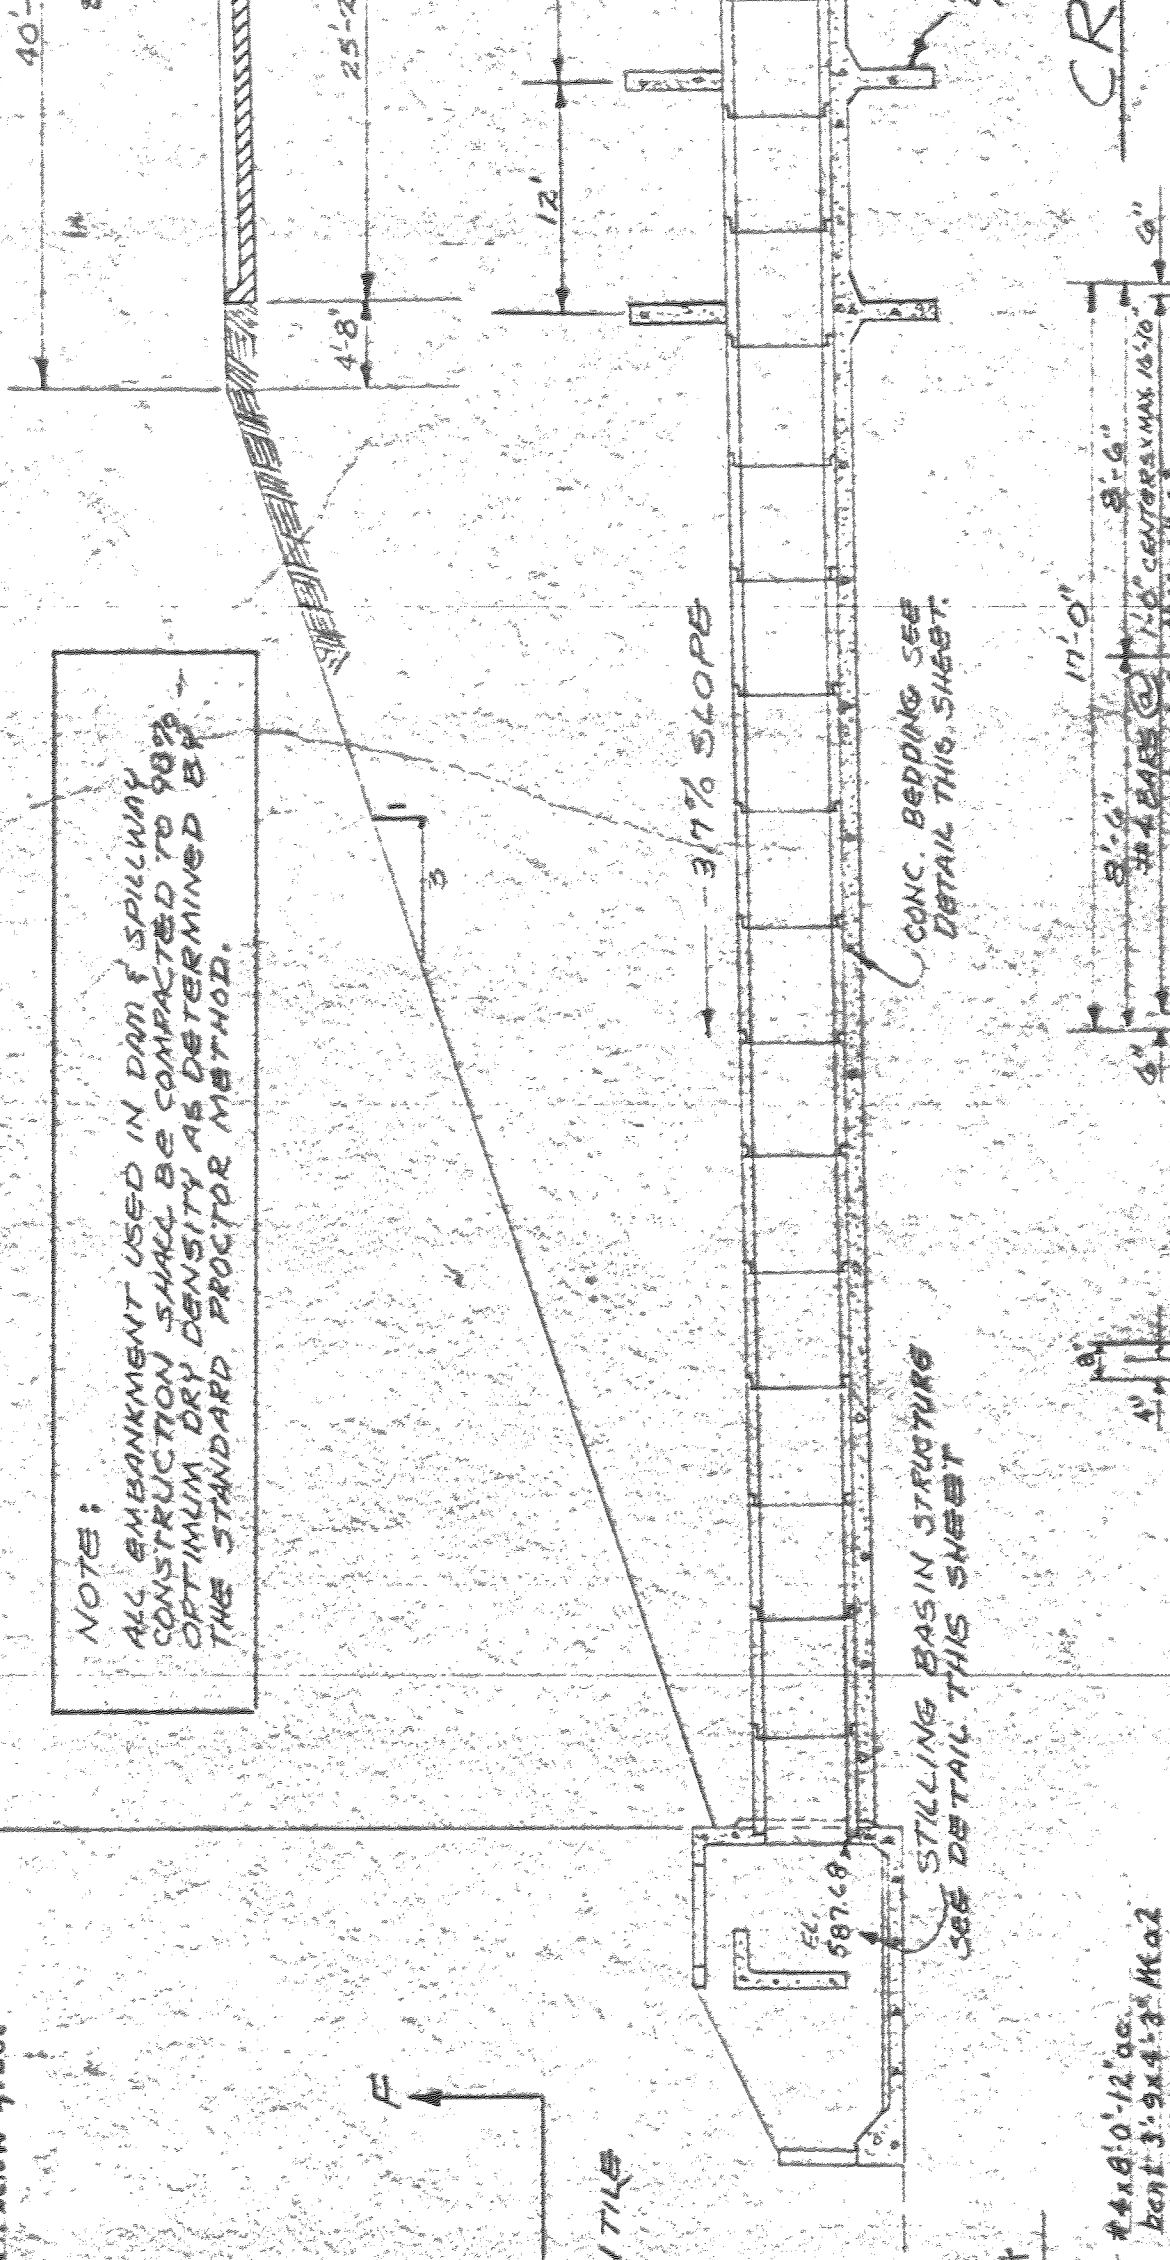

NOTE:  
 ALL EMBANKMENT USED IN DAM & SPILLWAY  
 CONSTRUCTION SHALL BE COMPACTED TO 90%  
 OPTIMUM DRY DENSITY AS DETERMINED BY  
 THE STANDARD PROCTOR METHOD.

F

N TILES

3:1% SLOPE

STILLING BASIN STRUCTURE  
SEE DETAIL THIS SHEET

CONC. BEDDING SEE  
DETAIL THIS SHEET.

17'-0"

8'-6"

8'-6"

6"

CR

#4 @ 0'-12" OC.  
BENT 3'-9" x 4'-3" MAX

#4 @ 8'-0" CENTER MAX 16'-0"